



Werner Kemminer GmbH

 Junkersstr. 30-38  
 D-32257 Bünde


 Telefon 05223 / 9663-0  
 Telefax 05223 / 9663-29

 www.Kemminer.de  
 Info@kemminer.de

## Maßblatt für

# Winkelflansche nach DIN 24155 Reihe 3

DIN-Ausführung Juli 1966

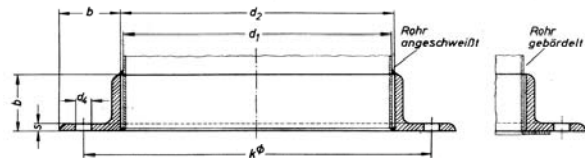

Nennweite	Rohr-Außen Ø $d_1$	Flansch						Schraube	Gewicht <sup>1)</sup> (7,85kg/dm <sup>3</sup> )
		Innendurchmesser		$b \times s$	Loch-kreis Ø k $\pm 0,5$	Loch Ø $d_4$ $\pm 0,5$	Loch-anzahl		
		$d_2$	Tol.						
140	144	146	(+1,5)	25x25x4	176	7,0	6	M 6	0,77
<b>160</b>	162	164	(+1,5)	25x25x4	194	7,0	6	M 6	0,86
180	181	183	(+1,5)	25x25x4	213	7,0	6	M 6	0,94
<b>200</b>	203	205	(+1,5)	25x25x4	235	7,0	6	M 6	1,04
224	227	229	(+1,5)	25x25x4	259	7,0	6	M 6	1,15
<b>250</b>	254	256	(+1,5)	25x25x4	286	7,0	6	M 6	1,27
280	286	288	(+1,5)	30x30x5	322	9,5	8	M 8	2,14
<b>315</b>	320	322	(+1,5)	30x30x5	356	9,5	8	M 8	2,37
355	359	361	(+1,5)	30x30x5	395	9,5	8	M 8	2,63
<b>400</b>	402	404	(+1,5)	30x30x5	438	9,5	12	M 8	2,91
450	451	453	(+1,5)	30x30x5	487	9,5	12	M 8	3,25
<b>500</b>	505	507	(+1,5)	30x30x5	541	9,5	12	M 8	3,61
560	567	569	(+2)	35x35x5	605	11,5	16	M 10	4,78
<b>630</b>	636	638	(+2)	35x35x5	674	11,5	16	M 10	5,33
710	713	715	(+2)	35x35x5	751	11,5	16	M 10	5,95
<b>800</b>	799	801	(+2)	35x35x5	837	11,5	24	M 10	6,61
900	896	898	(+2)	35x35x5	934	11,5	24	M 10	7,39
<b>1000</b>	1005	1007	(+2)	35x35x5	1043	11,5	24	M 10	8,26
1120	1128	1130	(+2)	40x40x6	1174	11,5	24	M 10	12,70
<b>1250</b>	1265	1267	(+2)	40x40x6	1311	11,5	24	M 10	14,20
1400	1419	1421	(+2)	40x40x6	1465	11,5	24	M 10	15,89
<b>1600</b>	1591	1593	(+2)	40x40x6	1637	11,5	32	M 10	17,73
1800	1784	1786	(+2)	40x40x6	1830	11,5	32	M 10	19,84
<b>2000</b>	2001	2003	(+2)	40x40x6	2047	11,5	32	M 10	22,22

Fettgedruckte Nennweiten bevorzugen

<sup>1)</sup> in kg

Werkstoff: S235JRG2 nach EN 10025

Sämtliche Maßangaben in mm