



Werner Kemminer GmbH

 Junkersstr. 30-38
 D-32257 Bünde


 Telefon 05223 / 9663-0
 Telefax 05223 / 9663-29

 www.Kemminer.de
 Info@kemminer.de

Maßblatt für

Winkelflansche nach
DIN 24155 Reihe 4

DIN-Ausführung Juli 1966

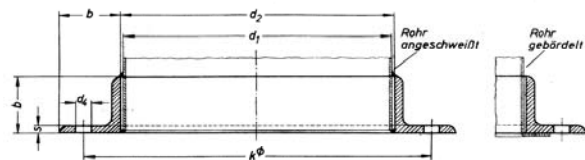

Nennweite	Rohr-Außen Ø _{d₁}	Flansch						Schraube	Gewicht ¹⁾ (7,85kg/dm ³)
		Innendurchmesser		b x s	Loch-kreis Ø k ± 0,5	Loch Ø _{d₄} ± 0,5	Loch-anzahl		
		d ₂	Tol.						
140	144	146	(+1,5)	35x35x5	182	11,5	8	M 10	1,42
160	162	164	(+1,5)	35x35x5	200	11,5	8	M 10	1,57
180	181	183	(+1,5)	35x35x5	219	11,5	8	M 10	1,72
200	203	205	(+1,5)	35x35x5	241	11,5	8	M 10	1,90
224	227	229	(+1,5)	35x35x5	265	11,5	8	M 10	2,09
250	254	256	(+1,5)	35x35x5	292	11,5	8	M 10	2,30
280	286	288	(+1,5)	40x40x6	332	11,5	8	M 10	3,56
315	320	322	(+1,5)	40x40x6	366	11,5	8	M 10	3,93
355	359	361	(+1,5)	40x40x6	405	11,5	8	M 10	4,36
400	402	404	(+1,5)	40x40x6	448	11,5	12	M 10	4,81
450	451	453	(+1,5)	40x40x6	497	11,5	12	M 10	5,34
500	505	507	(+1,5)	40x40x6	551	11,5	12	M 10	5,94
560	567	569	(+2)	50x50x6	629	14,0	16	M 12	8,50
630	636	638	(+2)	50x50x6	698	14,0	16	M 12	9,46
710	713	715	(+2)	50x50x6	775	14,0	16	M 12	10,53
800	799	801	(+2)	50x50x6	861	14,0	24	M 12	11,67
900	896	898	(+2)	50x50x6	958	14,0	24	M 12	13,02
1000	1005	1007	(+2)	50x50x6	1067	14,0	24	M 12	14,53
1120	1128	1130	(+2)	60x60x8	1200	18,0	32	M16	25,79
1250	1265	1267	(+2)	60x60x8	1337	18,0	32	M16	28,82
1400	1419	1421	(+2)	60x60x8	1491	18,0	32	M16	32,22
1600	1591	1593	(+2)	60x60x8	1663	18,0	40	M16	35,89
1800	1784	1786	(+2)	60x60x8	1856	18,0	40	M16	40,16
2000	2001	2003	(+2)	60x60x8	2073	18,0	40	M16	44,95

Fettgedruckte Nennweiten bevorzugen

¹⁾ in kg

Werkstoff: S235JRG2 nach EN 10025

Sämtliche Maßangaben in mm