




Werner Kemminer GmbH
Junkersstr. 30-38
D-32257 Bünde
Telefon 05223 / 9663-0
Telefax 05223 / 9663-29
www.Kemminer.de
Info@kemminer.de

Maßblatt für

Flachflansche nach
DIN 24154 Reihe 3

DIN-Ausführung Juli 1966

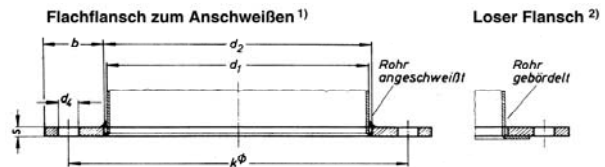

Nennweite	Rohr-Außen Ø d ₁	Flansch							Schraube	Gewicht ^{3,4)} (7,85kg/dm ³)
		Innendurchmesser d ₂			b x s	Loch-kreis Ø k ± 0,5	Loch Ø d ₄ ± 0,5	Loch-anzahl		
		fest ¹⁾	lose ²⁾	Tol.						
63	66	68	72	(+1)	20x 4	92	7,0	4	M 6	0,17
71	74	76	80	(+1)	20x 4	100	7,0	4	M 6	0,19
80	82	84	88	(+1)	20x 4	108	7,0	4	M 6	0,20
90	92	94	98	(+1)	20x 4	118	7,0	4	M 6	0,22
100	103	105	109	(+1)	20x 4	129	7,0	4	M 6	0,24
112	115	117	121	(+1)	20x 4	141	7,0	4	M 6	0,27
125	129	131	135	(+1)	20x 4	155	7,0	4	M 6	0,29
140	144	146	150	(+1,5)	25x 5	176	7,0	6	M 6	0,52
150	153	155	159	(+1,5)	25x 5	185	7,0	6	M 6	0,55
160	162	164	168	(+1,5)	25x 5	194	7,0	6	M 6	0,57
180	181	183	187	(+1,5)	25x 5	213	7,0	6	M 6	0,63
200	203	205	209	(+1,5)	25x 5	235	7,0	6	M 6	0,70
224	227	229	233	(+1,5)	25x 5	259	7,0	6	M 6	0,77
250	254	256	260	(+1,5)	25x 5	286	7,0	6	M 6	0,86
280	286	288	292	(+1,5)	30x 6	322	9,5	8	M 8	1,39
300	303	305	309	(+1,5)	30x 6	339	9,5	8	M 8	1,46
315	320	322	326	(+1,5)	30x 6	356	9,5	8	M 8	1,54
350	353	355	-	(+1,5)	30x 6	389	9,5	8	M 8	1,68
355	359	361	365	(+1,5)	30x 6	395	9,5	8	M 8	1,71
400	402	404	408	(+1,5)	30x 6	438	9,5	12	M 8	1,89
450	451	453	457	(+1,5)	30x 6	487	9,5	12	M 8	2,10
500	505	507	511	(+1,5)	30x 6	541	9,5	12	M 8	2,34
560	567	569	573	(+2)	35x 6	605	11,5	16	M 10	3,05
600	603	605	-	(+2)	35x 6	641	11,5	16	M 10	3,24
630	636	638	642	(+2)	35x 6	674	11,5	16	M 10	3,41
710	713	715	719	(+2)	35x 6	751	11,5	16	M 10	3,81
800	799	801	805	(+2)	35x 6	837	11,5	24	M 10	4,21
900	896	898	902	(+2)	35x 6	934	11,5	24	M 10	4,72
1000	1005	1007	1011	(+2)	35x 6	1043	11,5	24	M 10	5,28
1120	1128	1130	1134	(+2)	40x 8	1174	11,5	24	M 10	9,08
1250	1265	1267	1271	(+2)	40x 8	1311	11,5	24	M 10	10,16
1400	1419	1421	1425	(+2)	40x 8	1465	11,5	24	M 10	11,37
1600	1591	1593	1597	(+2)	40x 8	1637	11,5	32	M 10	12,68
1800	1784	1786	1790	(+2)	40x 8	1830	11,5	32	M 10	14,20
2000	2001	2003	2007	(+2)	40x 8	2047	11,5	32	M 10	15,91

Fettgedruckte Nennweiten bevorzugen

Werkstoff: S235JRG2 nach EN 10025

Sämtliche Maßangaben in mm

³⁾ Werte gelten für Flachflansche zum Anschweißen (Festflansche)

⁴⁾ in kg