



Werner Kemminer GmbH

 Junkersstr. 30-38
 D-32257 Bünde


 Telefon 05223 / 9663-0
 Telefax 05223 / 9663-29

 www.Kemminer.de
 Info@kemminer.de

Maßblatt für

Flachflansche nach DIN 24154 Reihe 4

DIN-Ausführung Juli 1966

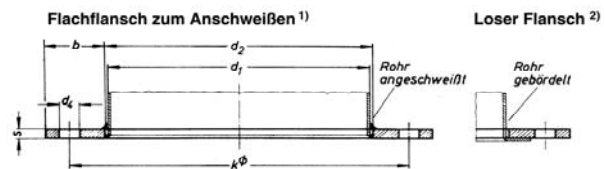

Nennweite	Rohr-Außen Ø d ₁	Flansch							Schraube	Gewicht ^{3,4)} (7,85kg/dm ³)
		Innendurchmesser d ₂			b x s	Loch-kreis Ø k ± 0,5	Loch Ø d ₄ ± 0,5	Loch-anzahl		
		fest ¹⁾	lose ²⁾	Tol.						
63	66	68	72	(+1)	30x 6	102	9,5	4	M 8	0,42
71	74	76	80	(+1)	30x 6	110	9,5	4	M 8	0,46
80	82	84	88	(+1)	30x 6	118	9,5	4	M 8	0,49
90	92	94	98	(+1)	30x 6	128	9,5	4	M 8	0,54
100	103	105	109	(+1)	30x 6	139	9,5	4	M 8	0,59
112	115	117	121	(+1)	30x 6	151	9,5	4	M 8	0,64
125	129	131	135	(+1)	30x 6	165	9,5	4	M 8	0,70
140	144	146	150	(+1,5)	35x 6	182	11,5	8	M 10	0,90
150	153	155	159	(+1,5)	35x 6	191	11,5	8	M 10	0,95
160	162	164	168	(+1,5)	35x 6	200	11,5	8	M 10	0,99
180	181	183	187	(+1,5)	35x 6	219	11,5	8	M 10	1,09
200	203	205	209	(+1,5)	35x 6	241	11,5	8	M 10	1,20
224	227	229	233	(+1,5)	35x 6	265	11,5	8	M 10	1,33
250	254	256	260	(+1,5)	35x 6	292	11,5	8	M 10	1,47
280	286	288	292	(+1,5)	40x 8	332	11,5	8	M 10	2,54
300	303	305	309	(+1,5)	40x 8	349	11,5	8	M 10	2,67
315	320	322	326	(+1,5)	40x 8	366	11,5	8	M 10	2,81
350	353	355	-	(+1,5)	40x 8	399	11,5	8	M 10	3,07
355	359	361	365	(+1,5)	40x 8	405	11,5	8	M 10	3,11
400	402	404	408	(+1,5)	40x 8	448	11,5	12	M 10	3,43
450	451	453	457	(+1,5)	40x 8	497	11,5	12	M 10	3,81
500	505	507	511	(+1,5)	40x 8	551	11,5	12	M 10	4,24
560	567	569	573	(+2)	50x 8	629	14,0	16	M 12	5,95
600	603	605	-	(+2)	50x 8	665	14,0	16	M 12	6,31
630	636	638	642	(+2)	50x 8	698	14,0	16	M 12	6,63
710	713	715	719	(+2)	50x 8	775	14,0	16	M 12	7,39
800	799	801	805	(+2)	50x 8	861	14,0	24	M 12	8,16
900	896	898	902	(+2)	50x 8	958	14,0	24	M 12	9,12
1000	1005	1007	1011	(+2)	50x 8	1067	14,0	24	M 12	10,20
1120	1128	1130	1134	(+2)	60x10	1200	18,0	32	M 16	16,97
1250	1265	1267	1271	(+2)	60x10	1337	18,0	32	M 16	19,00
1400	1419	1421	1425	(+2)	60x10	1491	18,0	32	M 16	21,28
1600	1591	1593	1597	(+2)	60x10	1663	18,0	40	M 16	23,66
1800	1784	1786	1790	(+2)	60x10	1856	18,0	40	M 16	26,52
2000	2001	2003	2007	(+2)	60x10	2073	18,0	40	M 16	29,73

Fettgedruckte Nennweiten bevorzugen

Werkstoff: S235JRG2 nach EN 10025

Sämtliche Maßangaben in mm

³⁾ Werte gelten für Flachflansche zum Anschweißen (Festflansche)

⁴⁾ in kg